
STEER SAFE, Inc.

STEER SAFE STABILIZERS

INSTALLATION INSTRUCTIONS DC-04 S figure 1

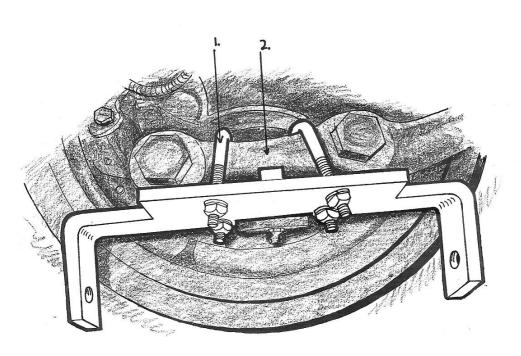

- **1.** BE SURE WHEELS ARE IN A STRAIGHT AHEAD POSITION by measuring from a point that is an equal distance from each wheel.
- 2. Place right hand wheel bracket on passenger side under steering arm with legs toward wheel.
- **3.** Put 3/8 "U" bolts (2) around control arm, start nuts and tighten. (Make sure bracket is not resting on boss).
- 1. "U" bolt
- 2. Steering arm